

Queen
TANKLESS®



Luxury Collection

THRONE
Toilet Systems

Queen

TANKLESS®

Design

Embrace the style of a Traditional Designed toilet while experiencing the Auto flush, warm seat and built in Bidet function to encompass a contemporary lifestyle with a strong point of difference





Warm Air Dryer

Air temperature is adjustable to your preference



1 Pocket 3 Way Nozzle (Stainless)

Posterior wash: cleanses the posterior.

Feminine wash: cleanses the vaginal area comfortably with clean aerated water.

Enema wash: sends off a stream of clean water into the rectum to help pass a motion.



Available In

- Ceramic Porcelain



Hi-tech wireless remote

Auto flush is available by wireless remote control. All Bidet functions is available by remote control and the lamp shows the current operation.



Auto flushing

A small flush of about 3L will be used if the seat is occupied for less than 25 seconds. A full flush of about 4.5L will be used when the seat is occupied for over 25 seconds.

Dual auto flush is available by seat sensor after the user stands up.



Seat sensor

The seat sensor detects when you sit down on the seat and allows the toilet to flush when you leave.



Soft Close

The seat and lid close down softly.



Heated seat

The seat temperature is adjustable.



S-Trap Compatible

No noise on interlayers.

No need to dismantle the floor if water leaks.

No need to visit one's neighbour to repair a water leak.

Less cost against wall-hung toilet system.



Super water saving toilet

The system features perfect flushing even with low water pressure (1.5kgs/cm². 20L/min) with a considerable water saving of 3L for a half flush and 4.5L for a full flush.

(Min 150 kPa - Max 750 kPa, with 20L per minute water flow required)




Siphon water jet, Tornado flushing


Waste is flushed by the use of high pressure jet nozzles, known as Tornado flushing. This system, while extremely efficient uses only a small amount of water with its Siphon water jet technology.

Queen


TANKLESS®

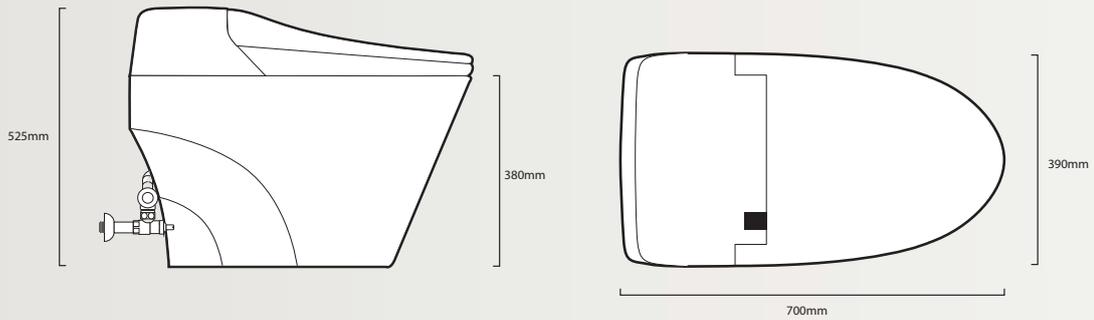

Floor drain S-Trap (Standard services / Concealed services)

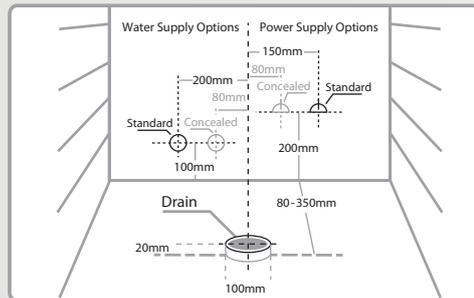

200mm-350mm - Standard set out
Queen installation S-Trap ONLY

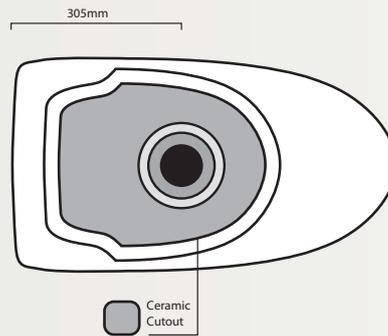

Water Pressure	Minimum 150kpa. Maximum 750kpa with 20L per minute minimum flow
Electrical	Standard 10amp power point required
Installation	To be carried out by a licensed plumber. Installation as per local region, council plumbing specifications and plumbing codes additional back flow device may be a requirement