

National

N1000



V01.22-TRADE



Proudly Australia's own brand

National Bidet was built with the Australian consumer in mind. Our bidets are Australian Watermarked and Certified to ensure high standards of safety and quality.

✓ Quality tested to Australian standards.



The National Bidet systems have all the iconic features below, PLUS: a one button wash function, fast heat, advanced self-cleaning nozzles and a self-diagnosis function. Includes a 1 year manufacturer warranty with extended warranty available.



Rear wash



Ladies wash



Enema wash



Air dryer



Heated Seat



Child Mode



Massage & Move



Night Light



This fully functional bidet with a simple remote control will gently cleanse and dry, leaving you feeling refreshed and energized. Stainless steel nozzles does the rear, feminine and enema wash and can be programmed to oscillate and pulse.



Australia's own brand


Designed for Australia. National is the fastest selling bidet in the country.

All the features of more expensive bidets at a budget cost.

Germ Protection

The sediment filter removes particles from the water before entering the bidet. Protecting your internal heating systems.

Water then passes through the ceramic balls, containing silver ions that attack bacteria, germs and virus.

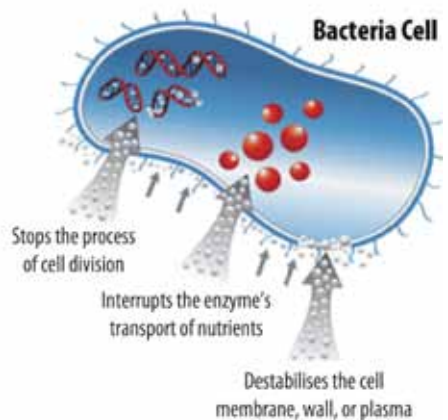

Specifications

Model	National
Filter	External
Nozzle	3 Spray tip, Stainless Steel Nozzles
Dimensions (WxHxD MM)	470x496x178
Net weight	4.9kg
Power Rating	AC 220 - 240V, 50Hz
Sterilization	Silver Ion Filter & Antimicrobial Plastic

Toilet Compatibility

Standard seat

A: 490mm or above

B: 135-195mm

C: 320mm or above

D: 410mm or above

*At 320mm once installed some porcelain may be visible, 330mm is preferred

The National range is watermarked to the Australian standard WMTS-051:2016. Bidet is supplied with a backflow device for installation in compliance with AU watermark standards.


Write your measurements here:

A

B

C

D

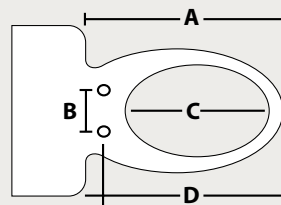

Top or Bottom fixing bolt options available. To be installed by a licensed plumber.
Power point and external tap required. Water Pressure 100-680KPA.

Reseller Details:

