INSTALLATION GUIDE

Coway BA-13

Electric bidet seat · Step-by-step installation

Read all steps before starting. Local plumbing regulations may apply.

Before you begin

01
Licensed plumber
All products must be installed by a licensed plumber.


02
Water off
Isolate the water supply at the wall tap before you start.

03
Power point
A power point is required near the toilet for testing.

04
Lay out all parts
Check every part below is present before starting.

What's in the box

Two push clips are supplied – one is a spare.

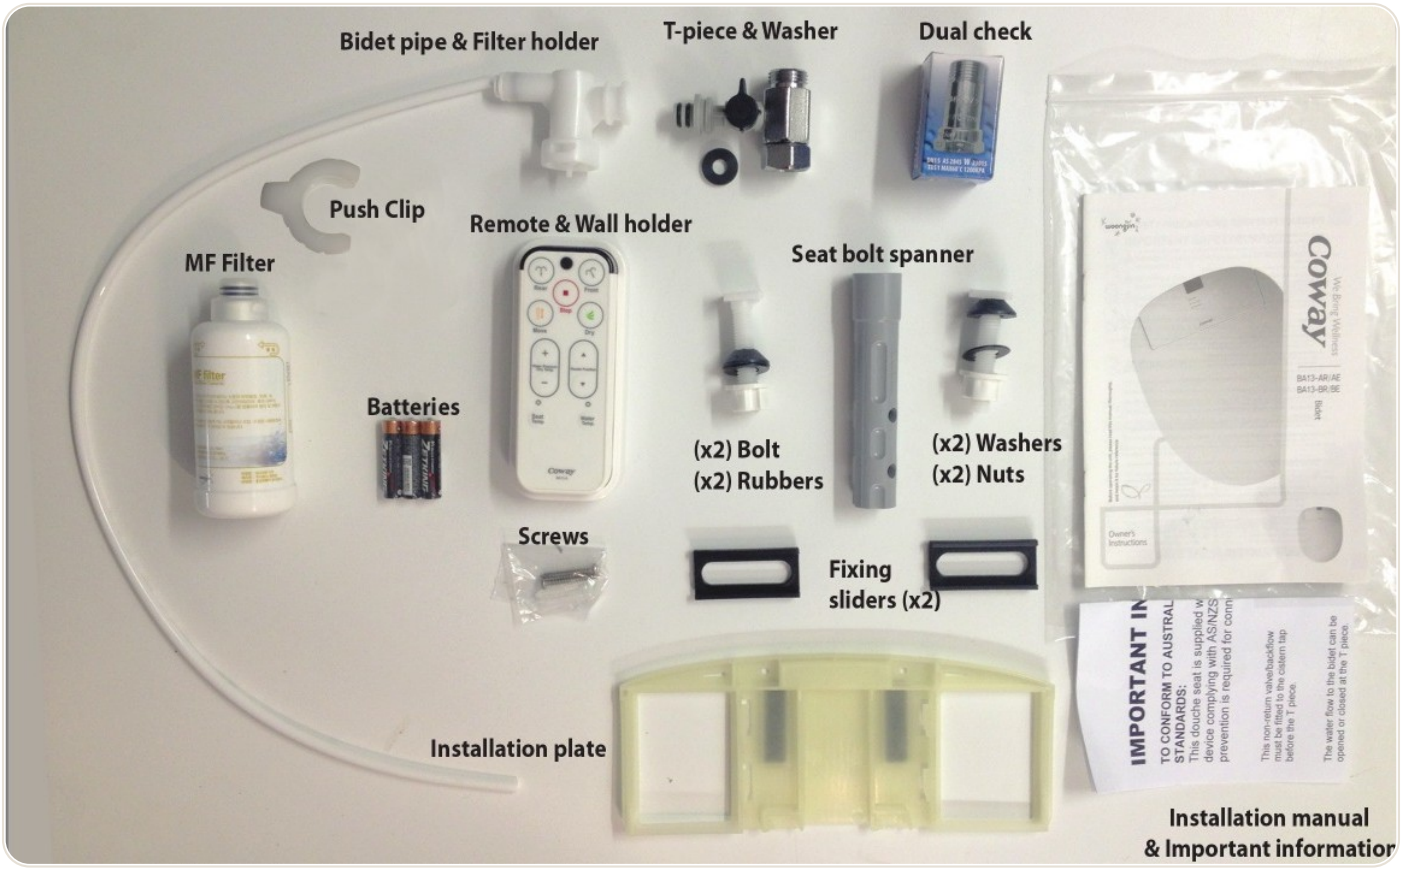

Water connection

Steps 1 – 5 · Fit the backflow valve, T-piece and filter holder



WATER CONNECTION

Remove the old seat

With the water supply turned off, remove the existing toilet seat and lid, then disconnect the hose from the tap fitting.



WATER CONNECTION

Fit the dual check valve

Fit the dual check (backflow) valve to the tap.



WATER CONNECTION

Fit the T-piece

Fit the T-piece to the dual check valve. To avoid damaging the T-piece, hold the top of it with a spanner while tightening.



WATER CONNECTION

Reconnect the flexible hose

Screw the flexible hose back on to the top of the T-piece.



WATER CONNECTION

Attach the filter holder

Push the filter holder onto the T-piece and secure it with the clip provided. Two clips are supplied – one is a spare.

Filter & mounting


Steps 6 – 11 · Install the filter, fit the plate and click the bidet into place



FILTER

Install the filter & bidet hose

Insert the MF filter and twist it clockwise to lock, then insert the bidet hose.

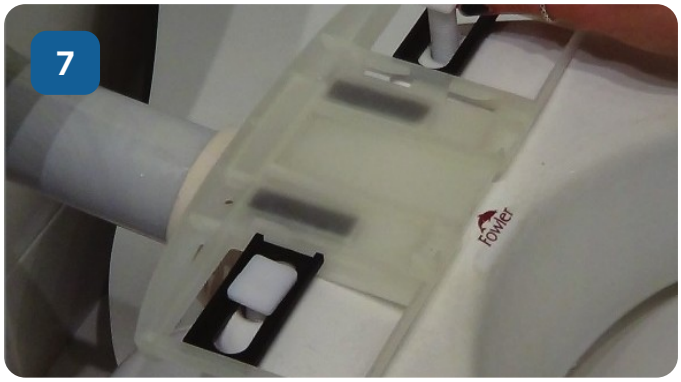

MOUNTING

Position the installation plate

Place the installation plate on the toilet and pass the bolts through the fixing sliders into the seat fixing holes.



MOUNTING

Secure the plate

From underneath, screw on the rubbers, washers and nuts.



MOUNTING

Fit the bidet

Place the bidet onto the toilet and push it backwards onto the installation plate.



MOUNTING

Lock into place

Keep pushing back until the bidet clicks into place.



WATER CONNECTION

Connect the bidet pipe

Push the bidet pipe firmly into the inlet on the left-hand side of the bidet.

Remote & testing


Steps 12 – 15 · Set up the remote, check for leaks and test



REMOTE CONTROL

Insert the batteries

Place the supplied batteries inside the remote control.

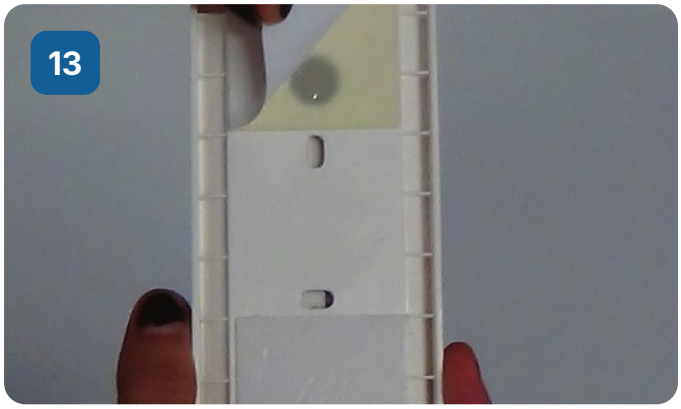

REMOTE CONTROL

Mount the remote holder

Peel the backing off the remote holder and stick it to the wall at eye level.



TESTING

Check for leaks

Turn the water on and check every joint for leaks with a piece of toilet paper. Tighten joints if required.



TESTING

Power up & test

Plug into power. Sit on the toilet – the seat sensor must be covered – and press the wash button.

Troubleshooting

Water leaks where the white pipe connects.

The pipe is not fully inserted. Push it firmly into the fitting until it seats.

The nozzle extends but no water comes out.

Check the lever on the T-piece is in the horizontal (open) position.

Contractors installing for The Bidet Shop: please call us on completion of the job and have the client fill out the evaluation form.

Need a hand?

Our Australian team can solve any installation problem for you.

1300 243 387

sales@thebidetshop.com.au