INTELICLEAN AIR 9000

ADVANCED HYGIENE WITH BUILT-IN BACKFLOW PROTECTION

InteliClean is an innovative Australian owned and operated brand, created to bring an intelligent smart bidet designed specifically for the Australian market.

With an elegant, modern European-influenced design, the InteliClean Air 9000 is one of the most advanced retrofit bidets available. It was designed to meet Australian health and quality standards, with a unique built-in backflow prevention system and a slimline, easy-to-use remote control.



WHAT MAKES THE AIR 9000 DIFFERENT

The InteliClean Air 9000 was the first bidet of its kind with an inbuilt backflow prevention system, and it is packed with premium features to suit every member of the family.



BUILT-IN BACKFLOW PREVENTION

An incorporated break tank uses a pump, a 25 mm air gap and a cistern-like system to stop water flowing back into the mains supply. It provides the highest standard of health and safety, and complies with Australian backflow prevention requirements, so no additional backflow device is needed at installation.



AUTOMATIC

DEODORISER

Activated by the seat sensor when you sit down. It removes bad odours by drawing air out of the bowl through a charcoal block, neutralising any smells.

DESIGNED FOR ALL AGES

CHILD MODE

Press the Child button and the bidet automatically adjusts, reducing the water pressure to 50% and lowering the temperature for a gentler wash.



EASY GUIDE TO THE INTELICLEAN AIR 9000 REMOTE CONTROL

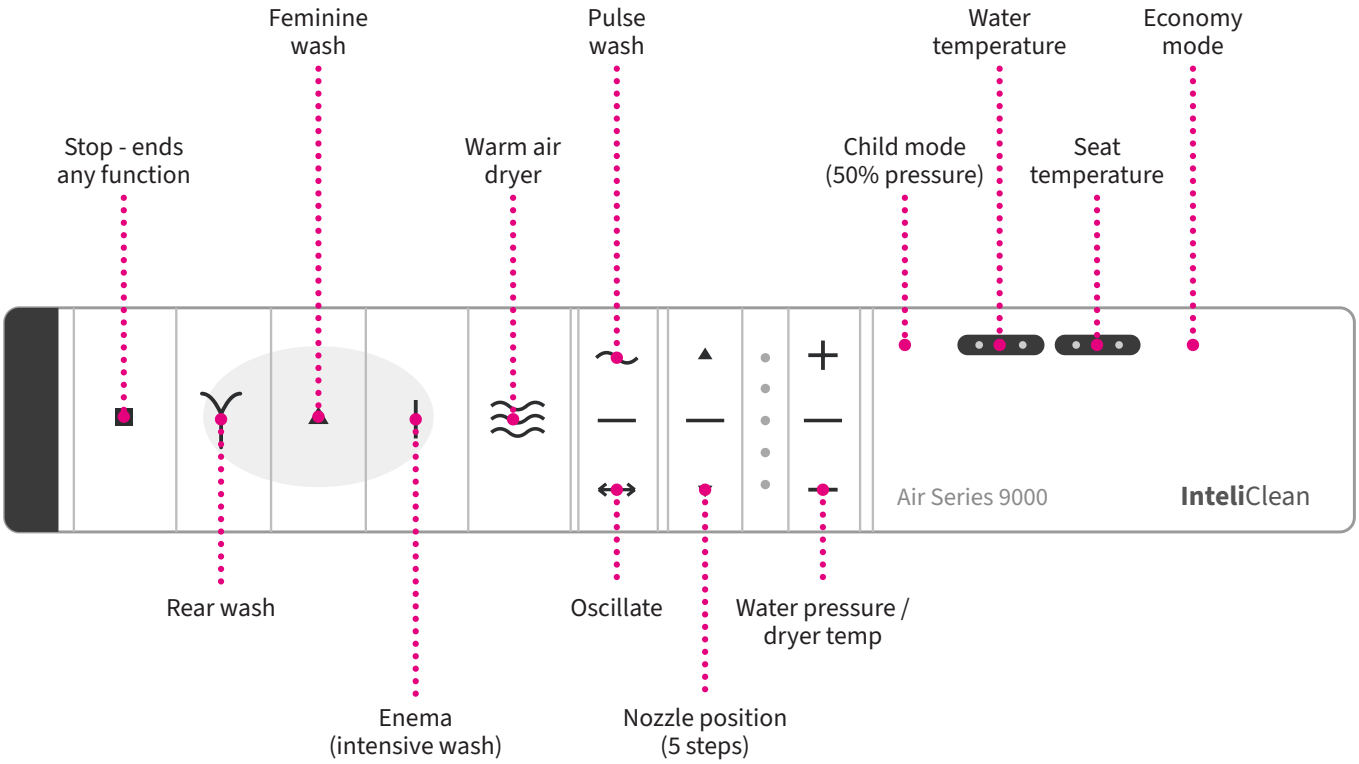



SLIMLINE, SIMPLE & ALWAYS WITHIN REACH



Advanced technology lets every feature fit into one slimline remote. It can be held in your hand or mounted on the wall to suit your needs.

Mini side control: Power, Rear Cleansing and Nozzle Cleansing buttons are also on a small pad on the side of the seat.



BUILT FOR THE WHOLE FAMILY

This sleek, intelligent bidet includes heated water, a heated seat and a warm air dryer, plus premium features such as the automatic deodoriser and multiple wash functions: pulse, oscillate, enema and child.

Designed with the user in mind, it is easy to use and easy to keep clean.

180 kg

Safe working load on the advanced seat

Sit-on lid

Soft close lid designed to be sat on without damage

Child mode

50% water pressure for a gentler wash

HYGIENE & EVERYDAY COMFORT



WARM WATER CLEANSING + 5 PRESSURE SETTINGS



WARM AIR DRYING



HEATED SEAT



REAR & FEMININE CLEANSING

A rear wash for the bottom area and a separate feminine cleanse for women. Water has 4 temperature settings (no heat + 3 heat) and 5 pressure settings.



PULSE & OSCILLATE

Pulse sprays water in a rhythmic, pulsating action for a soothing wash. Oscillate moves the nozzle forward and backward for a more thorough cleanse.



ENEMA

A pencil-thin stream of soft aerated water, ideal for constipation. Use while trying to pass a bowel movement for the best results.



5-STEP NOZZLE POSITION

The nozzle adjusts to 5 different positions and should be set to the correct position for washing.



HARDENED STAINLESS STEEL NOZZLE

A single hardened stainless steel nozzle reduces soiling and bacterial growth. It cleans itself automatically before and after each use, with a manual cleaning button as well.



3-STAGE WATER PROTECTION

A two-stage MF filter removes sediment and passes water through silver ion ceramic balls, then EM ceramics provide a final stage of purification.



ANTIBACTERIAL PLASTIC

The bidet is made with antibacterial plastic to ensure the highest degree of hygiene and cleanliness.

SMART, SAFE & EFFICIENT





SOFT CLOSE, SIT-ON LID

Hydraulic dampers at the hinges let the seat and lid close softly, and the lid is designed so a person can sit on it without causing damage.

QUICK RELEASE

Press the quick release button and the bidet slides straight off, so you can clean under it easily. It also lets the bidet fit fully concealed toilets.

FAST HEATING

The water starts warming as soon as you sit down, so it is at your chosen temperature by the time you press a wash button.

SEAT SENSOR

A moisture-activated sensor, located between 3 and 5 o'clock on the seat, ensures the bidet functions cannot operate unless the seat is occupied.

ECONOMY & POWER SAVING

The bidet senses when it is not occupied and goes into power save mode. This function can be turned on and off.

WATER SAVING

An average wash uses only about a tea cup or two of water.

MINI SIDE CONTROL

Power, Rear Cleansing and Nozzle Cleansing are also available on a small pad on the side of the seat.

REGULAR & ELONGATED

Available in Regular and Elongated seat shapes to suit your toilet pan.



INSTALLATION & FIT

The Air 9000 is a retrofit bidet seat and must be installed by a licensed plumber in accordance with the Plumbing Code of Australia (PCA) and WMTS 051:2016 Bidet Douche Seats.

It includes an integral high hazard backflow prevention device complying with AS 2845.1 & 2, AS/NZS 3500.1 and the PCA.

Before installing, check:

- Whether your tap is on the left, right or inside the cistern
- A power point within 1.5 m of the toilet
- Whether you have access to the toilet seat bolts
- Toilet dimensions and seat shape
- Whether additional installation accessories are required

Please note: Looking at the toilet, the 1.5 m power lead comes from the right-hand side and the water pipe from the left-hand side. **This cannot be changed.** Toilets with access to the seat bolts need Bottom Fixing Bolts, purchased separately.

ADDITIONAL PRODUCTS THAT MAY BE REQUIRED

IF YOUR TOILET / TAP IS...	YOU WILL NEED
Tap on the right-hand side	1 m of ¼" white pipe + 1 x John Guest Adaptor
Tap in the cistern	½" Internal Fitting Kit + 1 x John Guest Adaptor + 1 m of white pipe
Bottom fixing toilet	Bottom Fixing Bolts
Bottom fixing with arms/rails and an 80 mm spacer	Bottom Fixing Bolts + Extension Brackets
Top fixing toilet (with or without arms/rails)	Top Fixing Bolts
Top fixing with a 50 mm spacer (with or without arms/rails)	Extra Long Top Fixing Bolts
Top fixing with an 80 mm spacer	Extra Long Top Fixing Bolts + Stabilisers
Top fixing with an 80 mm spacer and arms/rails	Extra Long Top Fixing Bolts + Stabilisers + Extension Brackets

SPECIFICATIONS

Model	InteliClean Air 9000 Series · 9000R (Regular) / 9000E (Elongated)
Power rating	AC 230 V · 50/60 Hz · 1,470 W
Water inlet pressure	100 – 680 kPa
Dimensions (L x W x H)	Regular: 500 x 400 x 165 mm · Elongated: 526 x 400 x 165 mm
Weight	8.5 kg
Safe working load	180 kg
WASH	
Wash volume	0.5 – 1.0 L/min
Water temperature	4 settings (no heat + 3 heat levels)
Water pressure	5 settings
Nozzle	Single hardened stainless steel shaft, 3 spray tip, 5 positions, self-cleaning
Wash functions	Rear, feminine, enema, pulse, oscillate, child
COMFORT	
Warm air dryer	250 W · 5 temperature settings
Heated seat	55 W · 4 settings (no heat + 3 heat levels)
HYGIENE & SAFETY	
Filtration	Dual MF filter + EM ceramic (3-stage protection)
Backflow prevention	Integral break tank with pump and 25 mm air gap
Other	Automatic deodoriser, seat sensor, antibacterial plastic, IPX4 water resistance
Remote control	Infrared, 2 x AA batteries, handheld or wall mounted

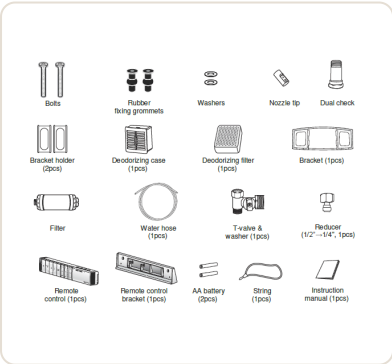

WHAT'S IN THE BOX

Air 9000 bidet seat, remote control and remote control bracket, bolts, rubber fixing grommets, washers, nozzle tip, dual check valve, bracket holders (2), bracket, deodorizing case and filter, filter, water hose, T-valve & washer, reducer, 2 x AA batteries, string and instruction manual.

3 YEAR

3 YEAR WARRANTY

2 years full replacement + 1 year parts & labour. Extend to 4 years in total by purchasing the extended warranty within the first 2 years. All products must be installed by a licensed plumber in accordance with WMTS 051:2016 Bidet Douche Seat.



ADVANCED HYGIENE, MADE SIMPLE

With built-in backflow protection, an automatic deodoriser and multiple wash functions, the InteliClean Air 9000 is loaded with features for the whole family. It is available in Regular and Elongated seat sizes, with specific toilet measurements required for compatibility.

Air 9000 Regular Seat

This bidet will fit on your existing toilet suite if the measurements of your pan are:

A: 495mm or above
B: Between 135 - 195mm
C: 320 - 330mm
D: 425 - 475mm



SWL: 180KG · C = 310mm without shroud

Air 9000 Elongated Seat

This bidet will fit on your existing toilet suite if the measurements of your pan are:

A: 520mm or above
B: Between 135 - 195mm
C: 350mm or above
D: 445 - 495mm



SWL: 180KG · C = 330mm without shroud

IPX4 WMTS 051 20094 E5780

Top or bottom fixing bolt options available. A power point and tap are required. Water pressure 100 – 680 kPa. Must be installed by a licensed plumber.