INTELICARE

SUPER SLIM SMART BIDET WITH A 250 KG SEAT

The InteliCare is the latest generation in hygiene technology, with a super slim design. At approximately 99 mm high, it looks more like a normal toilet seat than the large retrofit bidets on the market today.

It has all the standard features, such as bottom wash, ladies wash and a warm air dryer, plus a 5-step nozzle adjustment and pulse and oscillate settings for a much cleaner wash. It meets the requirements of AS/NZS 3500, AS/NZS 2845.1 & 2 and the Plumbing Code of Australia.



WHAT MAKES THE INTELICARE DIFFERENT

Designed with the user in mind, the InteliCare combines a super flat profile with a seat built for stability and strength, and it is so simple a child can use it.



SUPER FLAT PROFILE

At approximately 99 mm high, the InteliCare sits low and neat on your existing toilet. It has an extra-large seat and lift tabs, and is designed with the larger person in mind.



IMPROVED STABILITY

SEAT ANCHORS

Seat anchors hold the bidet firmly in place and eliminate a wandering seat. They are designed for side transfer, and the InteliCare is the only bidet in Australia to offer this function.

250 KG RATING

ADVANCED SEAT DESIGN

The seat has a 250 kg weight rating, where many other bidets hold only up to 120 kg. You can even sit on the lid while it is closed.



EASY GUIDE TO THE INTELICARE REMOTE CONTROL

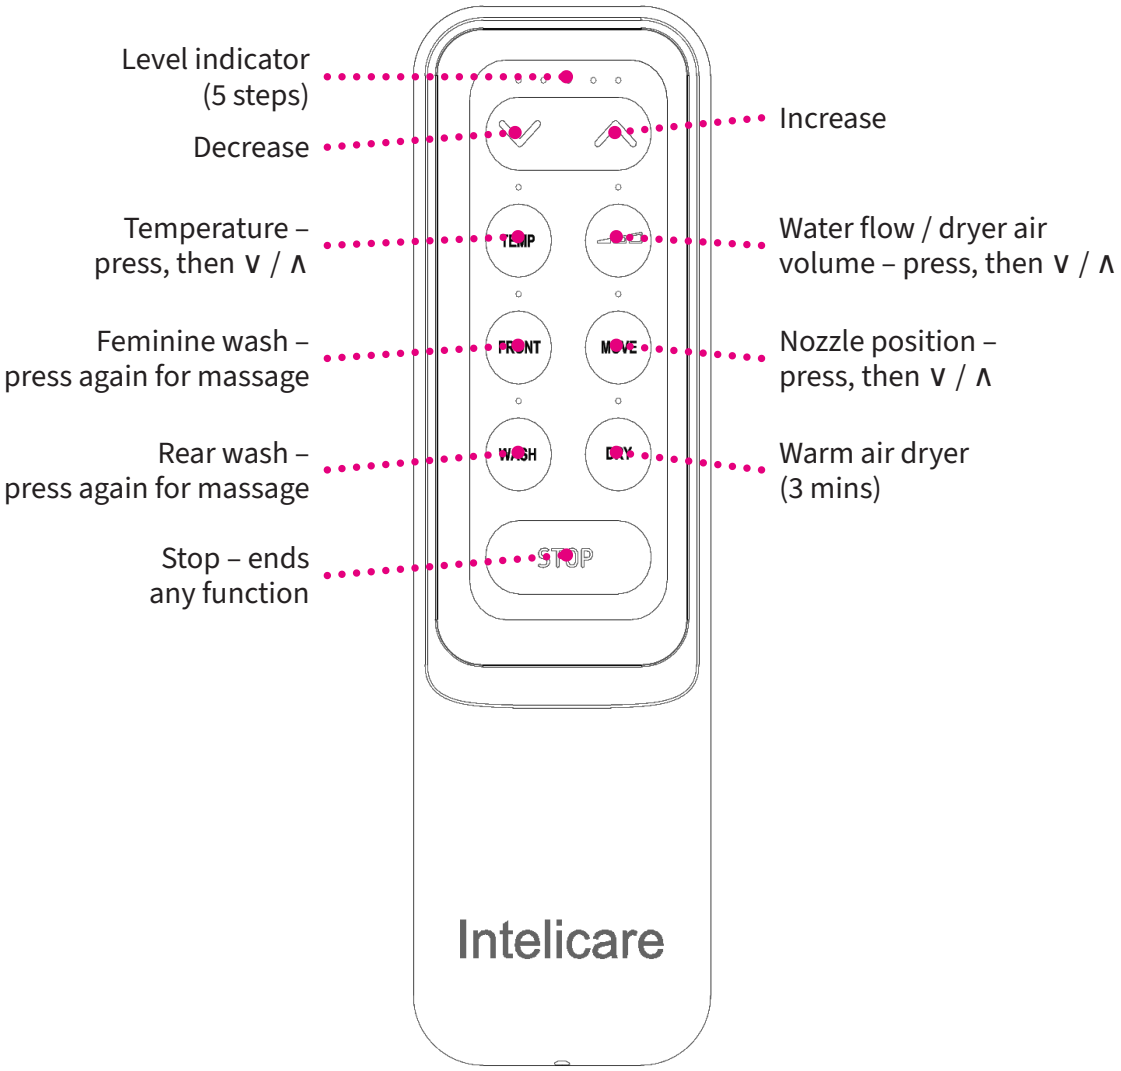

SIMPLE TO OPERATE, WITH THE FEWEST BUTTONS



The slimline remote can be held in your hand or mounted on the wall. It runs on 2 x AAA batteries.

Side control knob: twist the dial on the side of the seat to adjust the water pressure while you wash, or press it to start and stop.





BUILT FOR THE WHOLE FAMILY

So simple a child can use it, the InteliCare delivers ultimate performance with the fewest buttons. A smart night light comes standard, turning on and off automatically depending on the light in the room.

For easy cleaning, the seat and lid can be removed using the quick release.

250 kg

Weight rating on the advanced seat

99 mm

Approximate height of the super flat profile

Sit-on lid

Designed so you can sit on the lid while closed

HYGIENE & EVERYDAY COMFORT



WARM WATER CLEANSING + 5 FLOW SETTINGS



WARM AIR DRYING



SOFT CLOSE SEAT & LID



REAR & FEMININE WASH

A rear wash for the bottom area and a separate feminine wash for women, with 6 water temperature settings. Press the wash button again during a wash for a massage action.



PULSE, OSCILLATE & 5-STEP NOZZLE

Pulse and oscillate settings provide a much cleaner wash, and the nozzle position adjusts in 5 steps to suit each user.



SELF-CLEANING STAINLESS NOZZLE

The nozzle has a stainless tip and shaft, and cleans itself automatically. It can also be cleaned manually when needed.



ANTI-MICROBIAL PLASTIC

The materials used throughout the bidet protect against bacteria, fungi, viruses and germs, acting as a non-toxic health barrier.



OPTIONAL MF FILTER

A 2-stage external filter: a sediment filter protects the internal heating system, then ceramic balls collect silver ions that attack bacteria, germs and viruses. Must be ordered at the time of purchase.



SMART NIGHT LIGHT

For your safety, a night light comes standard. Auto light sensors turn it on or off depending on the environment.

SMART, SAFE & EASY TO CARE FOR



EASY TO REMOVE, CLEAN & REMOUNT

The seat and lid can be removed using the quick release dial, and the bidet slides straight off for cleaning underneath.



POWERFUL DRYER

A powerful warm air dryer with adjustable air temperature (6 settings) and air volume (5 settings).

SEAT SENSOR

The bidet functions only operate when the seat is occupied, so they cannot be activated by accident.

WATER TEMPERATURE MODES

Choose constant temperature, or a gradual cooling mode where the water cools to the inlet temperature during the wash.

POWER STANDBY

Simply close the lid to put the bidet into power standby mode.

SELF-CLEAN & DESCALING

If the bidet hasn't been used for more than 72 hours, it runs a short self-clean cycle when you next sit down. A descaling function helps keep it in top condition.

SIDE CONTROL KNOB

Adjust the water pressure while you are washing with just a twist of the dial on the side of the seat.

RETROFIT

The InteliCare replaces the seat on your existing toilet, and fits toilets with or without access to the seat bolts.



INSTALLATION & FIT

The InteliCare is a retrofit bidet seat and must be installed by a licensed plumber in accordance with the Plumbing Code of Australia (PCA) and WMTS 051:2016 Bidet Douche Seats.

It is supplied with a dual check valve and has an air gap in the water tank compliant with AS 2845.2, and must be installed with appropriate backflow protection conforming to the National Construction Code, Volume Three.

Before installing, check:

- Whether your tap is on the left, right or inside the cistern
- A power point within 1.5 m of the toilet
- Whether you have access to the toilet seat bolts
- Your toilet measurements (see the last page)

Please note: Looking at the toilet, the 1.5 m power lead comes from the right-hand side and the water pipe from the left-hand side. **This cannot be changed.** Reset the thermostat before installation, or the water may not heat up.

ADDITIONAL PRODUCTS THAT MAY BE REQUIRED

IF YOUR TOILET / TAP IS...	YOU WILL NEED
Tap on the left-hand side	No extra parts. The tee valve and flexible inlet hose are supplied
Tap on the right-hand side	1 m of ¼" white pipe + 2 x John Guest adaptors
Tap in the cistern	½" Internal Fitting Kit + 1 x John Guest adaptor + 1 m of white pipe
Fully concealed toilet (no access to seat bolts)	No extra parts. Expansion bolts are supplied
Toilet with arms/rails or a spacer	Extension brackets or extra long bolts may be required. Contact us before ordering

SPECIFICATIONS

Model	InteliCare (E553-0111)
Power rating	AC 230 V · 50 Hz · 1,500 W
Water pressure	100 – 680 kPa
Water supply temperature	4 – 30 °C
Dimensions (W x H x L)	384 x 119 x 520 mm
Net weight	7 kg
Safe working load	250 kg
WASH	
Wash functions	Rear, feminine, oscillate, pulse, oscillate + pulse
Water temperature	31 – 39 °C · 6 settings · constant or gradual cooling mode
Water flow	600 – 1,000 mL/min · 5 settings
Nozzle	Stainless tip & shaft · 5 positions · self-cleaning
Wash cycle	3 mins (constant mode) · 1 min (gradual cooling mode)
DRYER	
Warm air dryer	35 – 50 °C · 6 temperature settings · 5 air volume settings · 3 min cycle
HYGIENE & SAFETY	
Filtration	Standard filter · optional MF filter
Backflow prevention	Air gap in water tank + dual check valve
Safety devices	Thermal cut-off fuses, liquid level switch, thermostat
Other	Night light, seat sensor, soft close seat & lid, quick release, descaling, IPX4
Remote control	2.4 GHz wireless · 2 x AAA batteries · handheld or wall mounted



WHAT'S IN THE BOX

InteliCare bidet seat, remote control, remote control holder, holder screws & wall plugs, double-sided tape, screw cover, fixation plate, seat expansion bolts, adjustment sheets (2), install template, tee valve set, water filter, flexible water inlet hose and user manual.

2 YEAR

2 YEAR WARRANTY

1 year full replacement + 1 year parts & labour. Extend to 4 years in total by purchasing the extended warranty within the first 2 years. All products must be installed by a licensed plumber in accordance with WMTS 051:2016 Bidet Douche Seat.



SMART HYGIENE, SUPER SLIM

With a super flat profile, seat anchors and a 250 kg weight rating, the InteliCare is built for comfort and stability. It is available as an Elongated seat, with specific toilet measurements required for compatibility.

InteliCare Elongated Seat

This bidet will fit on your existing toilet suite if the measurements of your pan are:

A: 520mm or above
B: Between 140 - 195mm
C: 340mm or above
D: 425 - 489mm



SWL: 250KG

Measuring your toilet

A: cistern front to pan front
B: bolt hole centre to centre
C: inner front rim to inner back rim
D: bolt holes (mid) to pan front

Top or bottom fixing bolt options available.
Internal fixing kit available.

IPX4 WMTS 051 20094 E5780

To be installed by a licensed plumber. A power point and tap are required. Water pressure 100 – 680 kPa.