# INTELIWASH

## SUPER SLIM SMART BIDET WITH THE LARGEST USABLE SEAT

The InteliWash is the latest generation in hygiene technology, with a super slim design. At approximately 99 mm high, it looks more like a normal toilet seat than the large retrofit bidets on the market today.

It has the standard features, such as bottom wash and ladies wash, plus a 5-step nozzle adjustment, pulse and oscillate settings for a much cleaner wash, and a 250 kg weight rating. It meets the requirements of AS/NZS 3500, AS/NZS 2845.1 & 2 and the Plumbing Code of Australia.



# WHAT MAKES THE INTELIWASH DIFFERENT

Designed for comfort and simplicity, the InteliWash pairs a super flat profile with the largest usable seat area, and it's so simple a child can use it.



### SUPER FLAT PROFILE, LARGEST USABLE SEAT

The InteliWash is designed with the largest usable seat area, providing maximum comfort for users of all sizes, while sitting low and neat at about 99 mm high.



NO REMOTE NEEDED

### SIDE CONTROL

Buttons on the side of the seat let you start a rear wash or ladies wash, and stop, without the remote control.

250 KG RATING

### BUILT STRONG

With a 250 kg weight rating, the InteliWash is built for users of all sizes. A built-in air gap in the water tank provides backflow protection.



# EASY GUIDE TO THE INTELIWASH REMOTE CONTROL

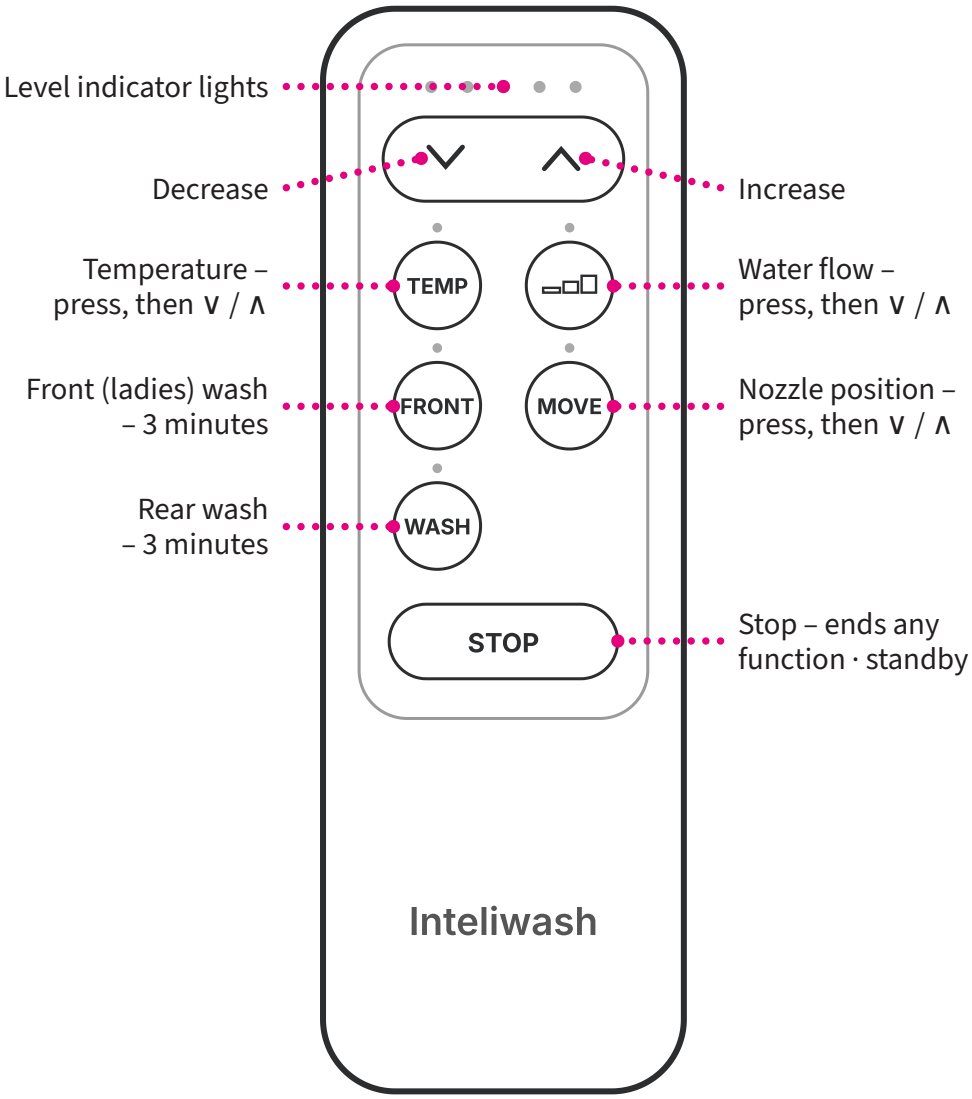


## SIMPLE TO OPERATE, WITH THE FEWEST BUTTONS




The slimline wireless remote can be held in your hand or wall mounted. It runs on 2 x AAA batteries.

**Massage:** during a wash, hold STOP and press FRONT to switch between oscillating, pulsating, or both.





## BUILT FOR THE WHOLE FAMILY

So simple a child can use it, the InteliWash delivers ultimate performance with the fewest buttons. A smart night light comes standard, turning on and off automatically depending on the light in the room.

For easy cleaning, the seat and lid can be removed using the quick release dial.

**250 kg**
Weight rating for users of all sizes

**99 mm**
Approximate height of the super flat profile

**3 min**
Wash cycle, with warm water from the tank

# HYGIENE & EVERYDAY COMFORT



**WARM WATER CLEANSING + 5 FLOW SETTINGS**



**MASSAGE ACTION**



**SOFT CLOSE SEAT & LID**



### REAR & LADIES WASH

A rear wash for the bottom area and a separate ladies wash, with 5 water temperature settings (31–39 °C).



### PULSE, OSCILLATE & 5-STEP NOZZLE

Oscillating, pulsating, or both, for a much cleaner wash. The nozzle position adjusts in 5 steps to suit each user.



### STAINLESS STEEL NOZZLE & TIP

Designed with your health in mind, the self-cleaning stainless steel nozzle and tip come standard.



### ANTI-MICROBIAL PLASTIC

The materials used throughout act as a non-toxic health barrier, protecting against bacteria, fungi, viruses and germs.



### OPTIONAL MF FILTER

A 2-stage external filter: a sediment filter protects the internal heating system, then ceramic balls collect silver ions that attack bacteria, germs and viruses. Must be ordered at the time of purchase.



### SMART NIGHT LIGHT

For your safety, a night light comes standard. In smart mode it turns on in the dark and off in bright light.

# SMART, SAFE & EASY TO CARE FOR






### EASY TO REMOVE SEAT & LID

The seat and lid can be removed using the quick release dial, and the bidet slides off its base plate for cleaning underneath.

### RETROFIT

Supplied on its own to fit your existing toilet, including fully concealed toilets and toilets with access to the seat bolts.

### SEAT SENSOR

Wash functions only work when you're seated, so they can't be activated by accident.

### SELF-CLEANING TANK

If it hasn't been used for 72 hours, it runs a 3-minute self-clean when you next sit down.

### STANDBY MODE

Hold the side Stop button for 6 seconds to put the bidet into standby, and again to turn it back on.

### DESCALING

A built-in descaling function helps keep the bidet in top condition.

### BUILT-IN AIR GAP

An air gap in the water tank plus a dual check valve provide backflow prevention to AS 2845.2.

### WATER RESISTANT

Rated IPX4 for peace of mind in the bathroom.

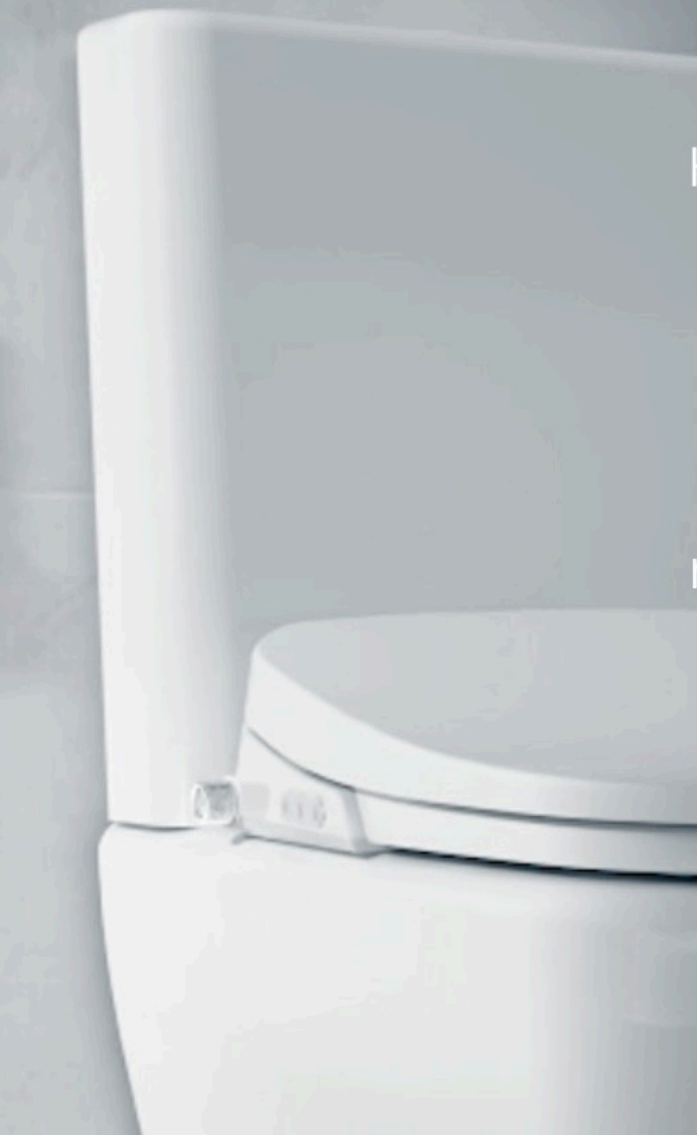

# INSTALLATION & FIT

The InteliWash is a retrofit bidet seat and must be installed by a licensed plumber in accordance with AS/NZS 3500, the Plumbing Code of Australia (PCA) and WMTS 051:2016 Bidet Douche Seats.

It has an air gap in the water tank compliant with AS 2845.2, is supplied with a dual check valve, and must be installed with appropriate backflow protection conforming to the National Construction Code, Volume Three.

**Before installing, check:**

- Whether your tap is on the left, right or inside the cistern
- A power point within 1.5 m on the right of the toilet
- Whether you have access to the toilet seat bolts
- Your toilet measurements (see the last page)

**Please note:** Looking at the toilet, the power lead comes from the **right-hand side** and the water connection from the **left-hand side**. **This cannot be changed.** Local authorities may require an RPZ valve, so check before installing.

## ADDITIONAL PRODUCTS THAT MAY BE REQUIRED

| IF YOUR TOILET / TAP IS... | YOU WILL NEED |
|---|---|
| Tap on the left-hand side | No extra parts. Dual check valve, T-connector, filter and hose supplied |
| Tap on the right-hand side | 1 m of ¼" white pipe + 2 x John Guest adaptors |
| Tap in the cistern | ½" Internal Fitting Kit + 1 x John Guest adaptor + 1 m of white pipe |
| Fully concealed toilet | No extra parts. Top fixing bolts and grommets are supplied |
| Toilet with arms/rails or a spacer | Extension brackets or extra long bolts may be required. Contact us before ordering |

# SPECIFICATIONS

| | |
|---|---|
| **Model** | InteliWash Retro (side inlet) |
| **Power rating** | AC 220 – 240 V · 50/60 Hz |
| **Water pressure** | 100 – 680 kPa |
| **Water supply temperature** | 4 – 35 °C |
| **Dimensions (W x H x L)** | 370 x 105 x 520 mm |
| **Net weight** | Approx. 7 kg |
| **Safe working load** | 250 kg |
| **WASH** | |
| **Wash functions** | Rear, ladies, oscillating, pulsating, oscillating + pulsating |
| **Water temperature** | 31 – 39 °C · 5 settings (default 3rd) · tank heating |
| **Water flow** | 350 – 650 mL/min · 5 settings (default 3rd) |
| **Nozzle** | Stainless tip & shaft · 5 positions · self-cleaning & manual cleaning |
| **Wash cycle** | 3 minutes |
| **HYGIENE & SAFETY** | |
| **Filtration** | Standard filter · optional MF filter |
| **Backflow prevention** | Air gap in water tank + dual check valve |
| **Safety** | Residual current device on the power lead |
| **Other** | Night light, seat sensor, soft close seat & lid, quick release, side buttons, descaling, IPX4 |
| **Remote control** | 2.4 GHz wireless · 2 x AAA batteries · handheld or wall mounted |




## WHAT'S IN THE BOX

InteliWash bidet seat, remote control, user manual, filter, ½" flex hose, installation template, dual check valve, T-shaped connector and top fixing bolts with rubber grommets.

**2 YEAR**

## 2 YEAR WARRANTY

1 year full replacement + 1 year parts & labour. Extend to 4 years in total by purchasing the extended warranty within the first 2 years. All products must be installed by a licensed plumber in accordance with WMTS 051:2016 Bidet Douche Seat.






## SMART HYGIENE, SUPER SLIM

With a super flat profile, the largest usable seat area and a 250 kg weight rating, the InteliWash is built for comfort. Specific toilet measurements are required for compatibility.

### InteliWash Seat

**This bidet will fit on your existing toilet suite if the measurements of your pan are:**

**A: 520mm or above**
**B: Between 140 - 195mm**
**C: 340mm or above**
**D: 425 - 489mm**




*SWL: 250KG*

### Measuring your toilet

A: cistern front to pan front
B: bolt hole centre to centre
C: inner front rim to inner back rim
D: bolt holes (mid) to pan front

Top or bottom fixing bolt options available.
Internal fixing kit available.

IPX4 WMTS 051 20094 E5780

To be installed by a licensed plumber. A power point and tap are required. Water pressure 100 – 680 kPa.