# NATIONAL N-2000

## ULTRA-SLIM SMART BIDET, AUSTRALIA’S OWN BRAND

National is proudly Australia's own brand, built with the Australian consumer in mind. It is Australian WaterMarked and certified to ensure high standards of safety and quality.

It has all the iconic bidet features, plus a one-button wash, fast heating, advanced self-cleaning nozzles, a self-diagnosis function and a 180 kg weight rating, all in a seat just 99 mm high.



# WHAT MAKES THE NATIONAL N-2000 DIFFERENT

Classy and elegant, the National N-2000 is one of the slimmest bidets on the market, with smart features usually found on much more expensive models.

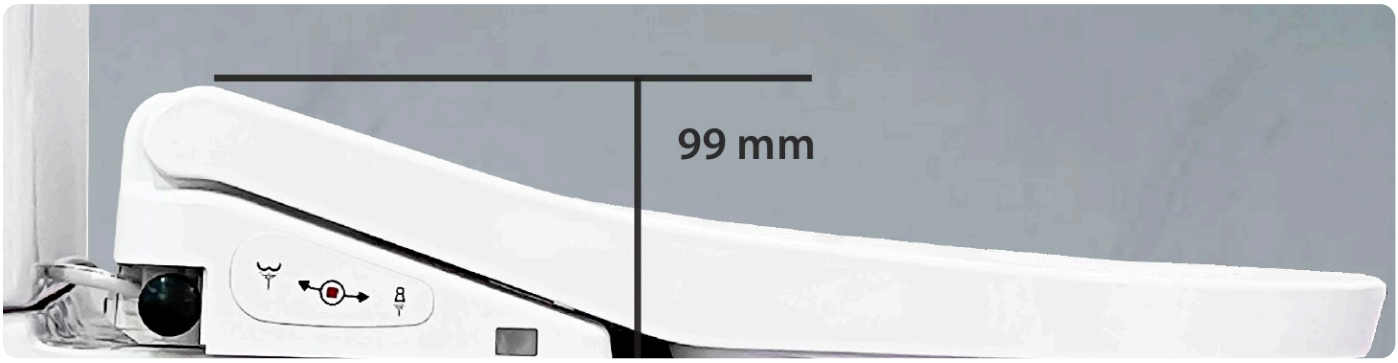


**ULTRA-SLIM 99 MM PROFILE**

At just 99 mm high, it's a popular choice for bathrooms with limited space, or for anyone who prefers a more compact, contemporary look on their existing toilet.




TWO USERS

**USER PRESETS**

Two users can each save their favourite water temperature, seat temperature, water pressure, nozzle position and dryer temperature, then recall them with one button.

SWIPE & TAP

**SIDE CONTROL PANEL**

A touch panel on the side of the seat lets you start a wash, oscillate or stop with a swipe or tap of a finger. Handy when the remote is out of reach.



# EASY GUIDE TO THE NATIONAL N-2000 REMOTE CONTROL

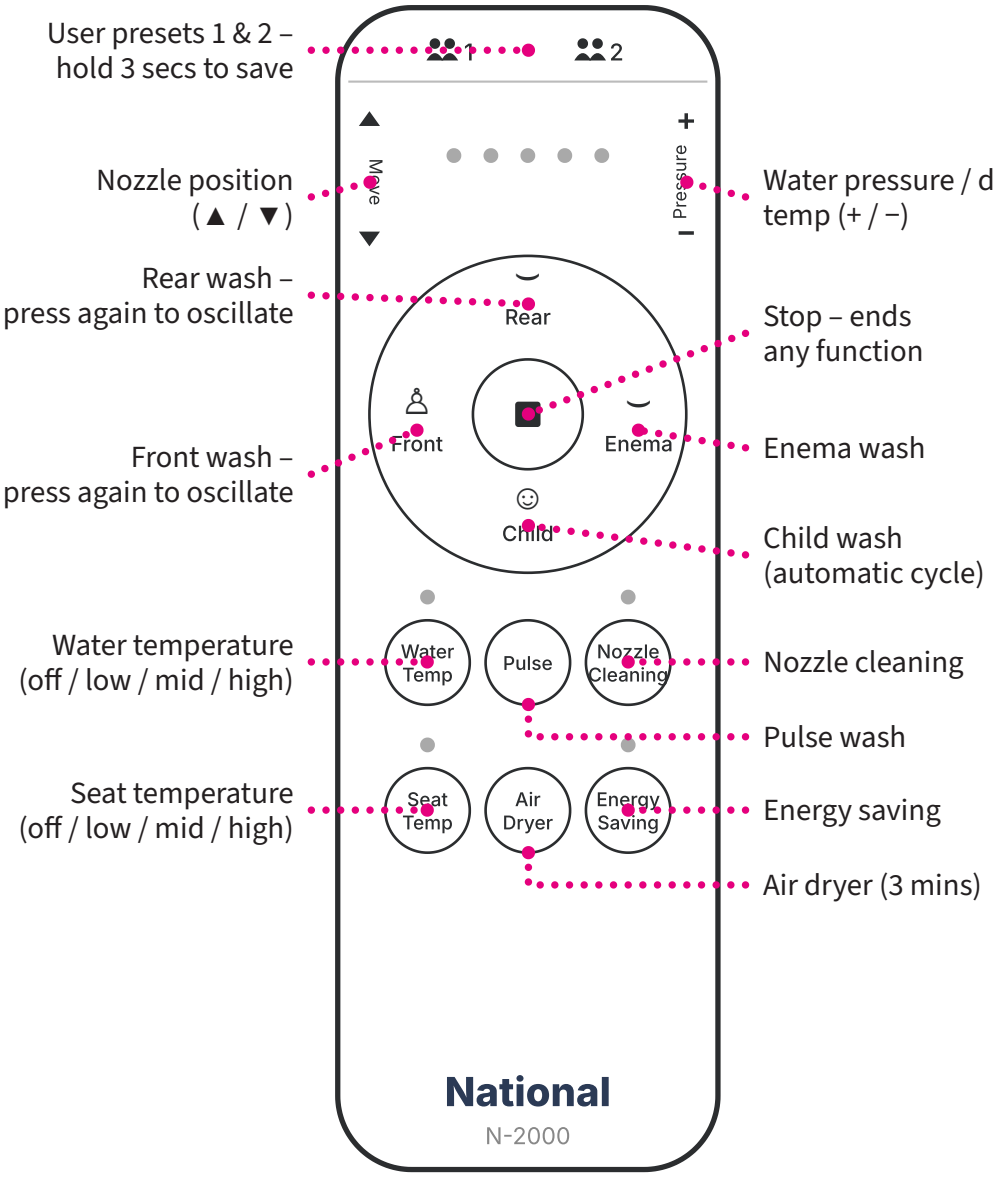


## RF REMOTE – NO NEED TO POINT IT AT THE BIDET



RF technology gives a broader signal range than infrared, so the remote doesn't rely on line of sight. Raised buttons are easy to feel, and indicator lights show your settings.

**2X mode:** hold Rear or Front for 3 seconds for a stronger wash.





## BUILT FOR THE WHOLE FAMILY

Child wash runs a specialised automatic cycle designed for children and seniors, covering both washing and drying. An interchangeable colour night light helps with night-time trips to the bathroom.

For easy cleaning, press the quick release and the bidet slides straight off its bracket.

**180 kg**

Safe working load on every seat shape

**99 mm**

Ultra-slim profile, one of the slimmest available

**3 sizes**

Round, U-shaped and Elongated to suit 99% of toilets

# HYGIENE & EVERYDAY COMFORT



**WARM WATER CLEANSING + 5 PRESSURE LEVELS**



**WARM AIR DRYING**



**HEATED SEAT**




### THREE JETS

Separate jets for rear wash, ladies (front) wash and enema give you your preferred wash, with optional pulse and oscillate.



### MASSAGE, PULSE & BUBBLE WASH

Oscillate moves the nozzle back and forth, pulse cycles the pressure from weak to strong, and aerated bubble wash adds comfort.



### SELF-CLEANING STAINLESS NOZZLES

The stainless steel nozzles are washed before and after every use, with a manual nozzle cleaning mode as well.



### DEODORISER

The deodorising filter starts automatically when you sit down, removing odour from the bowl during use and for a minute after.




### GERM PROTECTION FILTER

A sediment filter removes particles before the water enters the bidet, then ceramic balls with silver ions attack bacteria, germs and viruses.



### COLOUR NIGHT LIGHT

Choose from 7 colours or switch it off. It dims in energy saving mode and brightens when someone sits down.

# SMART, SAFE & EFFICIENT

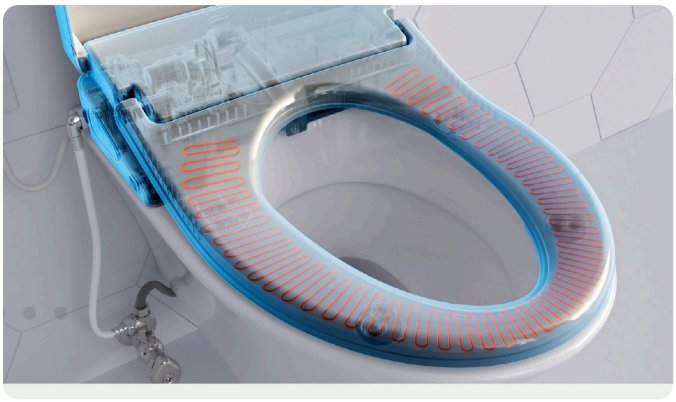



### HEATED SEAT & CONTINUOUS WARM WATER

Seat and water each have off plus 3 heat settings. Instant heating delivers continuous warm water for the whole wash.

### ENERGY SAVING

With consistent use, the bidet learns when it's used most to optimise energy savings. Two saving modes plus a sleep mode.

### SEAT SENSOR

Wash and dry functions only work when the seat is occupied, and stop when you stand up.

### 2X MODE

Prefer a stronger wash? Hold Rear or Front for 3 seconds to switch to the powerful 2X mode.

### SELF-DIAGNOSIS

If something goes wrong, the indicator lights show an error code to help our team fix it quickly.

### LOW-BURN PROTECTION

The seat uses a low voltage and lowers its temperature during long sits, for safer everyday use.

### QUICK RELEASE

Press the release button and the bidet slides forward off the bracket for cleaning underneath.

### WATER RESISTANT

The main body is rated IPX5 and the remote IPX7 for peace of mind in the bathroom.



# INSTALLATION & FIT

The National N-2000 is a retrofit bidet seat and must be installed by a licensed plumber in accordance with the Plumbing Code of Australia (PCA) and WMTS 051:2016 Bidet Douche Seats.

It conforms to AS 2845.2 Minimum Air Gap / AVB with a supplementary dual check valve, and must be installed with appropriate backflow protection conforming to the National Construction Code, Volume Three.

**Before installing, check:**

- Whether your tap is on the left, right or inside the cistern
- A power point within 1.5 m on the left of the toilet
- Whether you have access to the toilet seat bolts
- Your toilet measurements and seat shape (see the last page)

**Please note:** Looking at the toilet, the 1.5 m power lead and the water connection both come from the **left-hand side**. **This cannot be changed.** Top and bottom fixing bolt sets are both included.

## ADDITIONAL PRODUCTS THAT MAY BE REQUIRED

| IF YOUR TOILET / TAP IS... | YOU WILL NEED |
|---|---|
| Tap on the left-hand side | No extra parts. T-valve, dual check, filter and hose supplied |
| Tap on the right-hand side | 1 m of ¼" white pipe + 2 x John Guest adaptors |
| Tap in the cistern | ½" Internal Fitting Kit + 1 x John Guest adaptor + 1 m of white pipe |
| Bottom or top fixing toilet | No extra parts. Both bolt sets are supplied |
| Toilet with arms/rails or a spacer | Extension brackets or extra long bolts may be required. Contact us before ordering |

# SPECIFICATIONS

| | |
|---|---|
| **Model** | National N-2000 · Round (R) / U-shaped (U) / Elongated (E) |
| **Power** | AC 220 – 240 V · 1,430 W max |
| **Water pressure** | 100 – 680 kPa |
| **Dimensions (W x L x H)** | R 380 x 500 x 102 · U 380 x 521 x 99 · E 380 x 528 x 102 mm |
| **Net weight** | Approx. 4.5 kg |
| **Safe working load** | 180 kg |
| **WASH** | |
| **Wash functions** | Rear, front, enema, child, pulse, oscillate, bubble (aerated), 2X mode |
| **Water pressure** | 5 levels + 2X mode |
| **Water temperature** | Off + 3 levels (34 / 37 / 40 °C) · instant heating |
| **Nozzle** | 3 spray tip, stainless steel · 5 positions · self-cleaning |
| **COMFORT** | |
| **Heated seat** | Off + 3 levels (34 / 37 / 40 °C) |
| **Warm air dryer** | 400 W · 5 temperature levels · 3 min cycle |
| **HYGIENE & SAFETY** | |
| **Filtration** | External sediment filter + silver ion ceramic balls |
| **Deodoriser** | Catalyst carbon filter (replaceable) |
| **Other** | User presets (2), night light (7 colours), energy saving (2 modes), seat sensor, soft close, quick release |
| **Water resistance** | IPX5 body · IPX7 remote |
| **Remote control** | RF · AAA batteries · wall holder included |

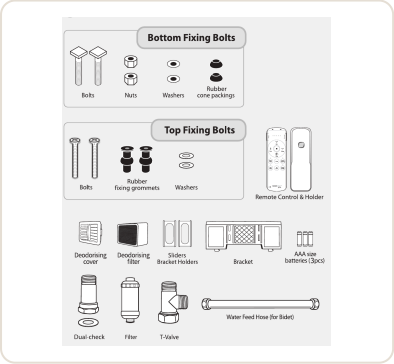


## WHAT'S IN THE BOX

National N-2000 bidet seat, bottom fixing bolts (bolts, nuts, washers, rubber cone packings), top fixing bolts (bolts, rubber fixing grommets, washers), bracket, sliders, bracket holders, dual check valve, filter, T-valve, water feed hose, deodorising cover and filter, remote control and holder, and AAA batteries.

**2 YEAR**

## 2 YEAR WARRANTY

1 year full replacement + 1 year parts & labour. Extend to 4 years in total by purchasing the extended warranty within the first 2 years. All products must be installed by a licensed plumber in accordance with WMTS 051:2016 Bidet Douche Seat.




## THREE SIZES TO SUIT 99% OF TOILETS

Choose Round, U-shaped or Elongated to match your toilet pan. Check all four measurements for your seat shape below.

### Round Seat

**Fits if your pan measures:**

**A: 495mm or above**
**B: 135 - 195mm**
**C: 335mm or above**
**D: 425 - 475mm**

*SWL: 180KG*

### 'U' Shaped Seat

**Fits if your pan measures:**

**A: 515mm or above**
**B: 135 - 195mm**
**C: 345mm or above**
**D: 440 - 490mm**

*SWL: 180KG*

### Elongated Seat

**Fits if your pan measures:**

**A: 520mm or above**
**B: 135 - 195mm**
**C: 355mm or above**
**D: 445 - 495mm**

*SWL: 180KG*

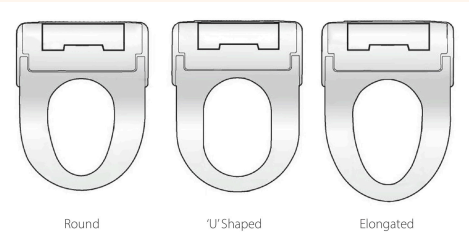





**A:** cistern front to pan front
**B:** bolt hole centre to centre
**C:** inner front rim to inner back rim
**D:** bolt holes (mid) to pan front

IPX4 WMTS 051 20094 E5780

Top or bottom fixing bolt options available. To be installed by a licensed plumber. A power point and tap are required. Water pressure 100 – 680 kPa.